FT Gas Filters

Low Pressure Gas Filters




Specifications


Size	1/4", 1/2"	
Removal Rating	≥0.002μm	
Retention	Greater than 99.9999999% Removal of all particles down to 0.002μm	
Rated Flow @ 10^9	60 SLPM 120 SLPM 200 SLPM	
Material	Filter element	316L Stainless Steel Hastelloy C-22
	Electropolished housing	316L Stainless Steel 316L Stainless Steel VAR Hastelloy C-22
Element Operating Condition	Maximum inlet pressure Maximum differential pressure Maximum operating temperature	12 Mpa (122kgf/cm^2) at 20°C 10 Mpa (101kgf/cm^2) at 20°C 460°C (Inert gas)
Helium Leak Rating	1 x 10^{-9} atm·cc/sec	
Surface Finish Interior	BA: Ra ≤ 10 μin, Ry ≤ 3 μm EP: Ra ≤ 5 μin, Ry ≤ 0.7 μm	

Flow Curve


[FT-60 SLPM]

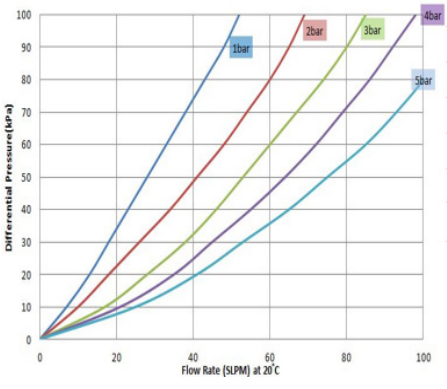


[FT-120 SLPM]

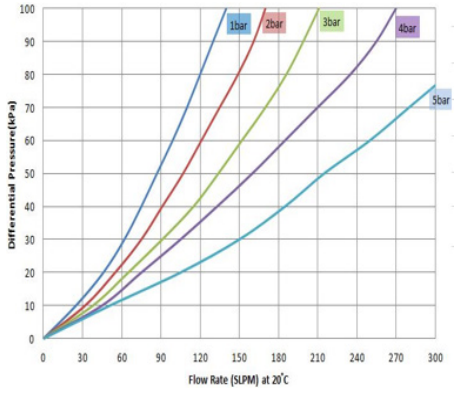

[FT-200 SLPM]

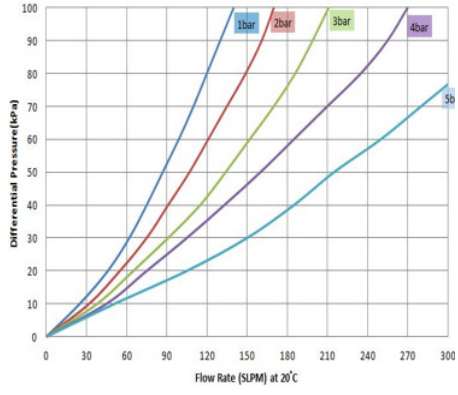

Dimensions

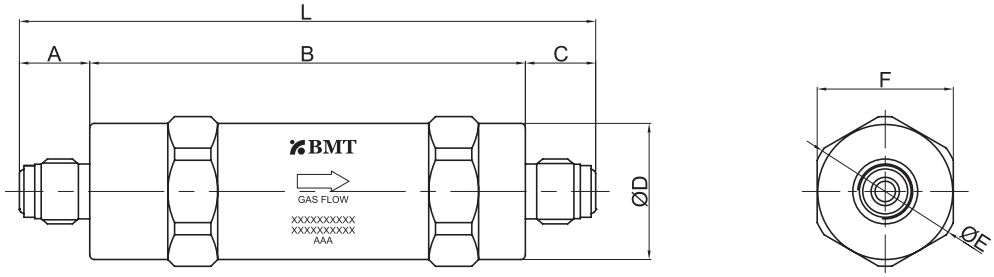

Male BVC

Connection Size	Part No.	Dimensions (mm)						
		A	B	C	D (Φ)	E (Φ)	F	L
Male BVC	FT-SMS-VM4-60-P FT-HMH-VM4-60-P	15.5	53	15.5	27.5	32	28	84
	FT-SMS-VM8-60-P FT-HMH-VM8-60-P	19	53	19	27.5	32	28	91
	FT-SMS-VM4-120-P FT-HMH-VM4-120-P	15.5	96	15.5	29.5	33	30	127
	FT-SMS-VM8-120-P FT-HMH-VM8-120-P	19	96	19	29.5	33	30	134
	FT-SMS-VM4-200-P FT-HMH-VM4-200-P	15.5	98	15.5	32.5	37	33	129
	FT-SMS-VM8-200-P FT-HMH-VM8-200-P	19	98	19	32.5	37	33	136

NOTE:
·Dimensions and Drawings are for reference only and are subject to change without prior notice.
·Unless otherwise specified, all dimensions are in millimeters.

Ordering Information

FT	-	A	B	-	C	D	-	E	-	F
FT		SM	S		VM	4	-	60	-	P

Standard feature
Optional

A	Materials	
	SM	316L Stainless Steel
	DM	316L Stainless Steel VAR
	HM	Hastelloy C-22

B	Element Material	
	S	316L Stainless Steel
	H	Hastelloy C-22

C	Connection Type	
	VM	Male BVC (BMT Vacuum Coupling)
	S	SUPERLOK Tube Fitting

D	Connection Size			
	ASTM Tube			
	Designator	Nominal Size	Outside Diameter	Wall Thickness
	4	1/4 in.	6.35 mm	1.00 mm
	6	3/8 in.	9.53 mm	1.00 mm
	8	1/2 in.	12.7 mm	1.24 mm
	12	3/4 in.	19.05 mm	1.65 mm

E	Rated Flow(SLPM)	
	60	60 SLPM
	120	120 SLPM
	200	200 SLPM

F	Wetted Surface Grade	
	BA is standard. No part designator needed.	
	P	EP

Part Number Examples

	FT-SMS-VM4-60-P		FT-HMH-VM8-60-P	
Series	**FT**	FT series	**FT**	FT series
Material	**SM**	316L Stainless Steel	**HM**	Hastelloy C-22
Element Material	**S**	316L Stainless Steel	**H**	Hastelloy C-22
Connection Type	**VM**	BVC Male	**VM**	BVC Male
Connection Size	**4**	1/4”	**8**	1/2”
Rated Flow(SLPM)	**60**	60 SLPM	**60**	60 SLPM
Grade	**P**	EP grade	**P**	EP grade

NOTE:
·Dimensions and Drawings are for reference only and are subject to change without prior notice.
·Unless otherwise specified, all dimensions are in millimeters.